

FRONT VIEW

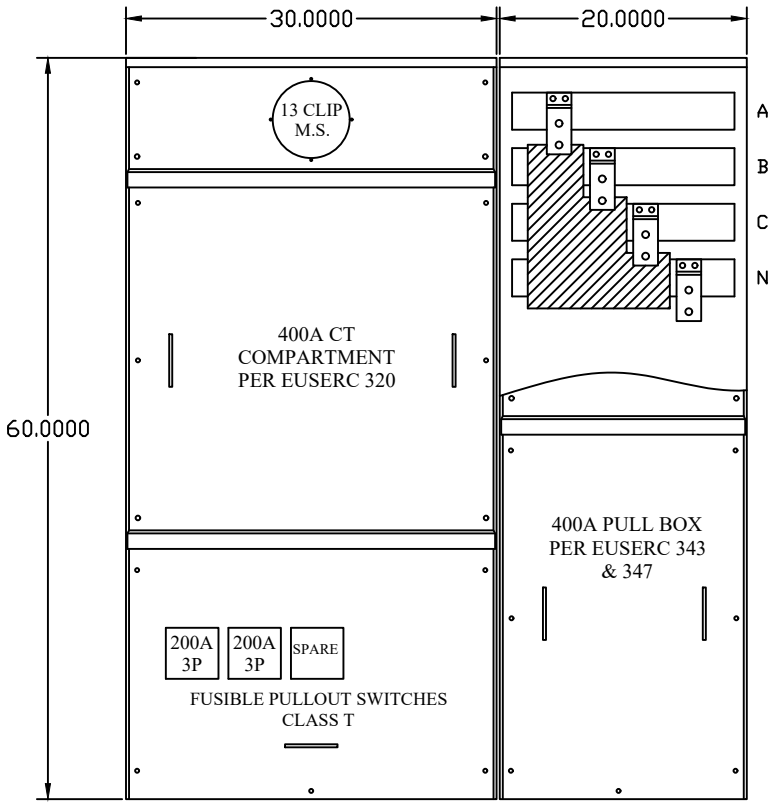


PADLOCKING PROVISIONS PROVIDED FOR ALL DISCONNECTS

* UNDERGROUND SECTION MAY BE INSTALLED ON EITHER LEFT OR RIGHT SIDE

BOTTOM VIEW

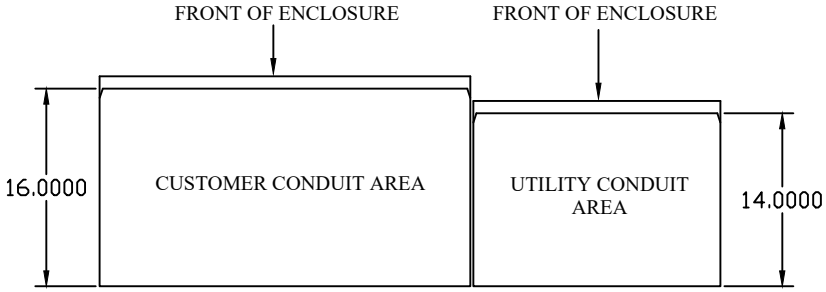

ONE-LINE DETAIL

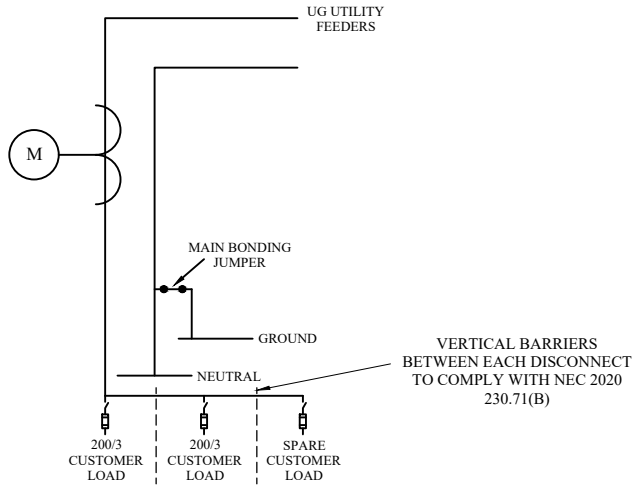

COMBINED TOTAL OF DISCONNECT RATINGS MUST NOT EXCEED AMPACITY VALUES LISTED BELOW*	
# OF DISCONNECTS USED	MAX TOTAL
1	400A
2-3	500A
4-6	570A

*IF DISCONNECT IS FOR PV USE ONLY (NO BATTERIES, CHARGERS, ETC.), THAT DISCONNECT CAN BE OMITTED FROM AMPACITY CALCULATIONS

CONSTRUCTION DETAILS

1. NEMA 3R RATED
2. 1/4" ALUMINUM BUS WITH ALSTAN 80 TIN PLATING
3. POWDERCOATED ANSI 61 GREY
4. UL LISTED 891 DEADFRONT SWITCHBOARD FILE#: E352324
5. COMPLIES WITH NEC 2020 230.71(B)

JMT ELECTRICAL MFG LLC
3441 W WHITTON AVE
PHOENIX AZ 85017
PHONE: 602-278-0897
FAX: 602-269-5018

JOB ADDRESS

AMPS	# OF PHASES	VOLTAGE	AIC RATING	MOUNT STYLE
400	3Ø/4W	120/208	100k AIC	WALL MOUNT

DISTRIBUTOR

CONTRACTOR

DATE	UTILITY	PO NUMBER	JMT PART NUMBER
	APS		JMT-433S-UG-208