
FRONT VIEW*


* EUSERC 354 ENCLOSURE NOT SHOWN FOR CLARITY OF INTERNAL VIEW

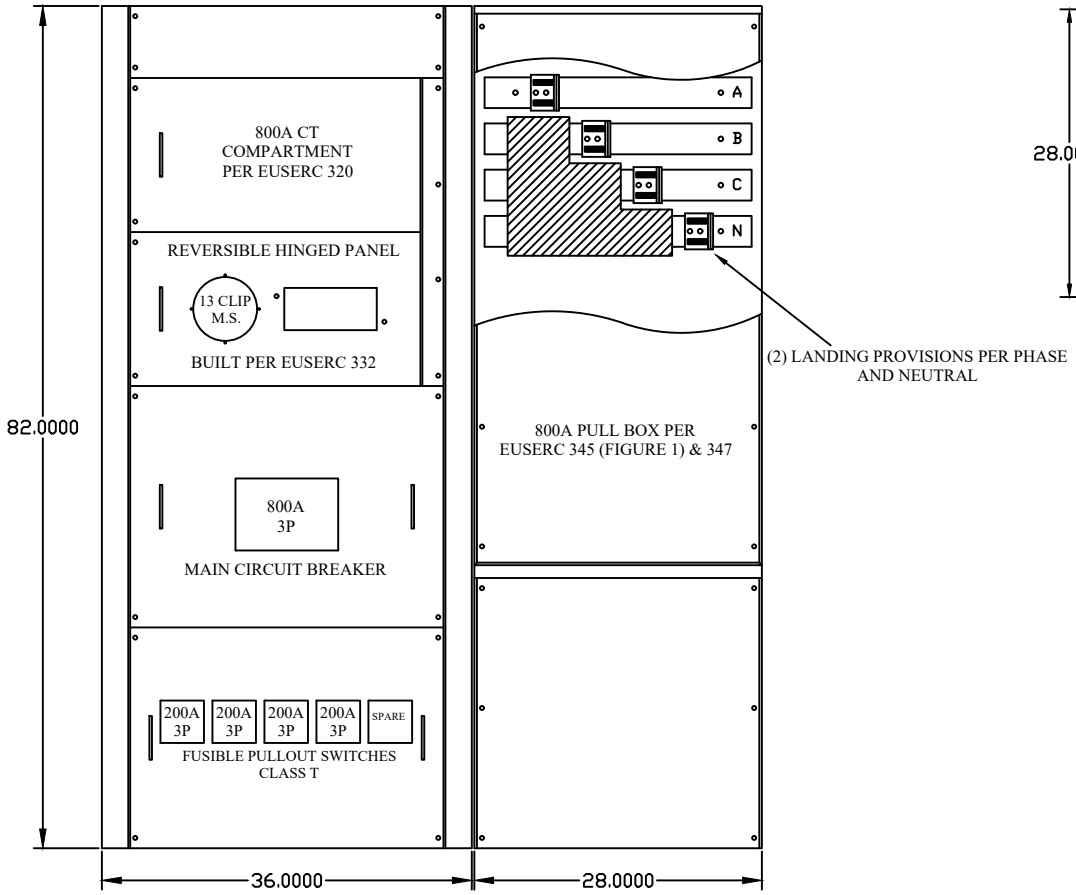


* UNDERGROUND SECTION MAY BE INSTALLED ON EITHER LEFT OR RIGHT SIDE

PADLOCKING PROVISIONS PROVIDED FOR ALL DISCONNECTS

BOTTOM VIEW

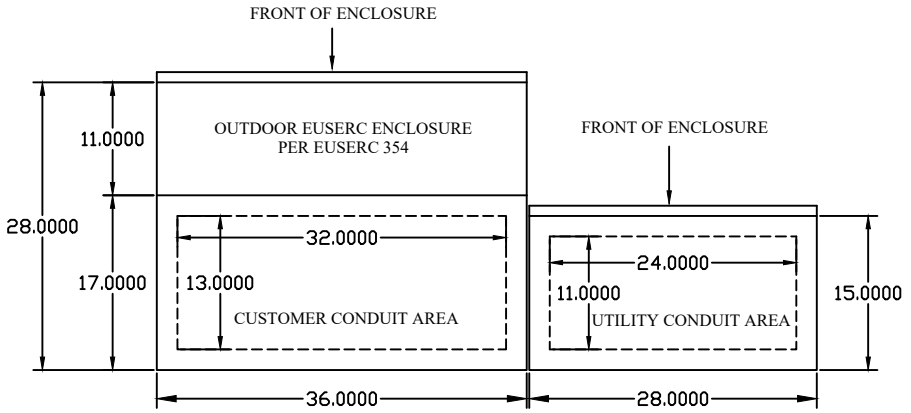

ONE-LINE DETAIL

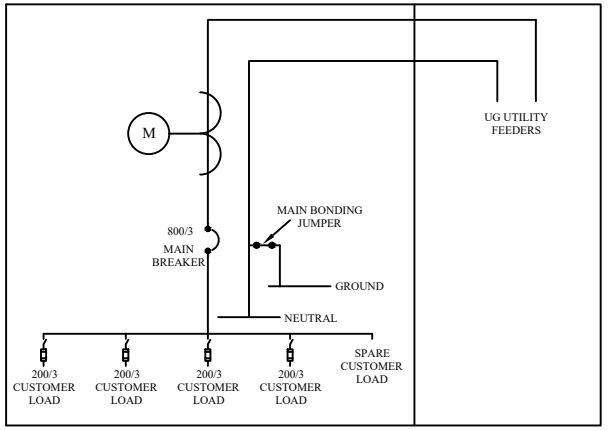

COMBINED TOTAL OF DISCONNECT RATINGS MUST NOT EXCEED AMPACITY VALUES LISTED BELOW*	
# OF DISCONNECTS USED	MAX TOTAL
1	800A
2-3	1000A
4-6	1140A

*IF DISCONNECT IS FOR PV USE ONLY (NO BATTERIES, CHARGERS, ETC.), THAT DISCONNECT CAN BE OMITTED FROM AMPACITY CALCULATIONS

CONSTRUCTION DETAILS

1. NEMA 3R RATED
2. 1/4" ALUMINUM BUS WITH ALSTAN 80 TIN PLATING
3. POWDERCOATED ANSI 61 GRAY
4. UL LISTED 891 DEADFRONT SWITCHBOARD FILE#: E352324

JMT ELECTRICAL MFG LLC
3441 W WHITTON AVE
PHOENIX AZ 85017
PHONE: 602-278-0897
FAX: 602-269-5018

JOB ADDRESS

AMPS	# OF PHASES	VOLTAGE	AIC RATING	MOUNT STYLE
800	3Ø/4W	120/208	65k AIC	PAD MOUNT

DISTRIBUTOR

CONTRACTOR

DATE	UTILITY	PO NUMBER	JMT PART NUMBER
	APS		JMT-853SMB-UGPM-208